

Chart Recorder SK-50P



FEATURES

- * Inkless, dry writing on pressure sensitive chart paper.
- * Accuracy 1.5% of full scale.
- * Recorders incorporate both chart tearoff and chart reroll.
- * Response time less than 1.0 second.
- * Units are compact and lightweight.
- * Usable chart width 50mm
- * Access window for notations on chart.

liquid@liquidcontrols.com.au

www.liquidcontrols.com.au

Liquid Controls (Aust) Pty Ltd

3/1 Quist Crt.,
Dandenong Vic. 3175

P O Box 4174
Dandenong Sth. Vic 3164

Tele: 03 9794 7066
Fax: 03 9794 0641

CHART RECORDER

SK-50P

FEATURES


The LIQUITRONICS SK-50P chart recorders write on pressure sensitive chart paper by making a series of dots which form a continuous line representing the function being monitored. Recording occurs when the mechanical chopper bar presses the stylus against the pressure sensitive chart paper advance per hour.

Recorders incorporate both chart tear off and chart reroll. In reroll mode, chart can easily be reviewed and rerolled while the recorder is operating. Open access window permits operator to make notations on chart.

Operating mode is easily changed from one to the other by the user. Reroll generally used for long runs. Tear off feature allows sections of chart to be removed for immediate analysis and filing.

SPECIFICATIONS

Type :	Analogue (single channel).
Operation type :	Galvanometric recorder.
Input :	4-20mA.
Accuracy :	$\pm 1.5\%$ of full scale.
Recording Type :	pressure sensitive dotting.
Power Consumption :	3.5VA
Chart Width :	50mm
Dimensions :	96Wx96Hx214D mm
Voltage :	240VAC
Panel Cutting :	92x92mm

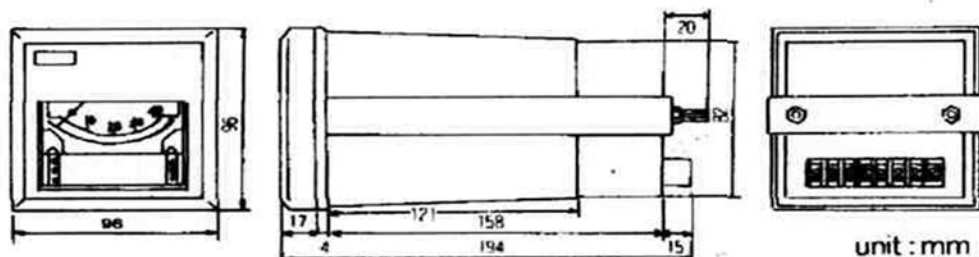

LIQUITRONICS®

Tele: +61(03) 9794 7066 Fax: +61(03) 9794 0641